PADDYVATOR

AGRO SOLUTIONS by SONALIKA

ROTARY TILLER

Salient Feature

- Special designed C-Type blade for puddling operation.
- Due cone waterproof seal.
- Multi speed gearbox for better pulverization effect.
- Floating type depth skid.
- Ultra light weight.
- Long lasting powder coating paint.



Only puddling special rotavator with dual rpm for better puddling.












PADDYVATOR ROTARY TILLER



TECHNICAL SPECIFICATION

SIZE	5.5 FEET	6 FEET	7 FEET	8 FEET
Fillage width (in/cm)	62/157	69/176	77/196	88/224
Total Width (in/cm)	70/178	78/198	86/218	97/246
Total Length (in/cm)	35/90	35/90	35/90	35/90
Height (in/cm)	43/110	43/110	43/110	43/110
Number of Blades	48	54	60	66
Type of blades	С	С	С	С
PTO Speed (RPM)	540	540	540	540
Weight (KG) Approx	345	362	390	420
Suitable Tractor HP	40+	45+	50+	55+
3-Point Hitch Type	Cat-II	Cat-II	Cat-II	Cat-II
Transmission type	GEAR	GEAR	GEAR	GEAR
Rotor tube diameter (in/cm)	3/7.6	3/7.6	3/7.6	3/7.6
Rotor Swing dia (in/cm)	17.7/45	17.7/45	17.7/45	17.7/45
Driveline safety Device	SHEAR BOLT	SHEAR BOLT	SHEAR BOLT	SHEAR BO

WALK AROUND PADDYVATOR

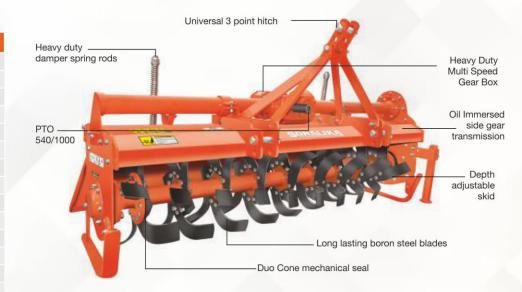



OIL SEALS IDEAL



DUO CONE MECHANICAL HEAVY DUTY BEARINGS 6311 AND 6309




HELICAL **ARRANGEMENTS OF BLADES**



ROBUST STRUCTURE FOR HEAVY VIBRATION FREE FILED OPERATION



OIL IMMERSED SIDE BEARING



SUITABLE FOR PUDDLING OPERATIONS

SONALIKA INDUSTRIES

(A UNIT OF INTERNATIONAL CARS & MOTORS LTD.)

Works & Admin Office: Vill. Chak Gujran, Jalandhar Road, Hoshiarpur- 146 022 (Pb.), India

Phone: +91 99149-34522, +91 1882-501320 | Email: info@sonalikaindsutries.com | Website: www.sonalika.com/agrosolutions

Auth. Dealer